


# 軸承英制鎖緊螺母



# Lock Nut Dimensions(Inches)

**N-00  
TN-00**

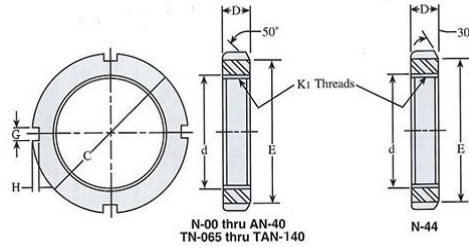

N-00 thru AN-40  
TN-065 thru TAN-140

N-44

Lock Nut Number.	Threads <sup>(1)</sup>		Outside Diameter C max.	Face Diameter E max.	Nut Width D max.		Slot	
	Major Dia. d nom.	No. per inch K1			N-00	TN-00	Width G min	Depth H max
N-00	0.391	32	0.755	0.625	0.229		0.120	0.073
N-01	0.469	32	0.880	0.719	0.323		0.120	0.073
N-02	0.586	32	1.005	0.813	0.323		0.120	0.104
N-03	0.664	32	1.130	0.938	0.354		0.120	0.104
N-04	0.781	32	1.380	1.125	0.385		0.178	0.104
N-05	0.969	32	1.568	1.281	0.416		0.178	0.104
N-06	1.173	18	1.755	1.500	0.416		0.178	0.104
TN-065	1.312	18	2.068	1.813	--	0.448	0.178	0.104
N-07	1.376	18	2.068	1.813	0.448	0.448	0.178	0.104
N-08	1.563	18	2.255	2.000	0.448	0.448	0.240	0.104
N-09	1.767	18	2.536	2.281	0.448	0.448	0.240	0.104
N-10	1.967	18	2.693	2.438	0.510	0.510	0.240	0.104
N-11	2.157	18	2.974	2.656	0.510	0.510	0.240	0.135
N-12	2.360	18	3.161	2.844	0.541	0.541	0.240	0.135
N-13	2.548	18	3.380	3.063	0.573	0.573	0.240	0.135
N-14	2.751	18	3.630	3.313	0.573	0.573	0.240	0.135
AN-15	2.933	12	3.880	3.563	0.604	0.604	0.360	0.135
AN-16	3.137	12	4.161	3.844	0.604	0.604	0.360	0.135
AN-17	3.340	12	4.411	4.031	0.635	0.635	0.360	0.166
AN-18	3.527	12	4.661	4.281	0.698	0.698	0.360	0.166
AN-19	3.730	12	4.943	4.563	0.729	0.729	0.360	0.166
AN-20	3.918	12	5.193	4.813	0.760	0.760	0.360	0.166
AN-21	4.122	12	5.443	5.000	0.760	0.760	0.485	0.198
AN-22	4.325	12	5.724	5.281	0.791	0.791	0.485	0.198
AN-24	4.716	12	6.130	5.688	0.823	0.823	0.485	0.198
AN-26	5.106	12	6.755	6.188	0.885	0.885	0.610	0.260
AN-28	5.497	12	7.099	6.531	0.948	1.198	0.610	0.260
AN-30	5.888	12	7.693	7.063	0.979	1.260	0.610	0.291
AN-32	6.284	8	8.068	7.438	1.041	1.291	0.610	0.291
AN-34	6.659	8	8.661	8.031	1.073	1.354	0.610	0.291
AN-36	7.066	8	9.068	8.375	1.104	1.416	0.735	0.323
AN-38	7.472	8	9.474	8.781	1.135	1.416	0.735	0.323
AN-40	7.847	8	9.849	9.156	1.198	1.510	0.735	0.323
N-44	8.628	8	11.005	9.843	1.260		0.980	0.510